

Heavy-Line Lift

clear floor | Item No.: TW 250 B4.5

400 V

Autom.

5000 kg



TW 250 B4.5 << 2-Post-lift

Description

This professional lift has a lifting capacity of 5.0 t and 3-stage telescopic lifting arms enabling you to lift anything from a small car to a transporter or a camper with a long wheelbase. With a height of 4450 mm, you can lift vehicles such as Fiat Ducato or a Mercedes sprinter e.g.

Features

- 1A Quality built with CE-Certificate
- Manufactured in accordance to ISO 9001
- Column chain gaurd
- Automatic safety-lock-relase system
- Automatic arm-locking system
- Two hydraulic cylinders provide powerful lifting and lowering
- Steel cable synchronization
- Special rolled section columns
- 3-stage telescopic lifting arms
- **NEW: Anti-Lift-Up-Button**, allows you to lower the lift without it having to rise before sinking a **230 V socket** placed in the control box.
- **NEW: Motor-Cover** included
- Stylish design, dust protection and noise reduction
- **Optional air connection (Air-Kit) available**

Delivery contents

- Lift incl. Power unit and Motor-Cover
- Heavy duty anchor bolts (12 pcs.)
- Transporter adapters (4 pcs.)
- Bracket for extension adapter
- Door protectors | English instruction manual
- Examination book and CE-Certificate

Included:

Practical storage bracket for two extension adapters (2 pcs.)



Transporter adapters (4 pcs.)



optionally available:



Please see our optional special adapter on page 31!





Air-Kit (TW 236PE-AIR)





Note try our technical decision helper (on page 6) before buying your 2-post lift(s)!

Details



- (1) E-Motor / NEW: Motor-Cover included
- (2) Control unit with automatic release of the safety latch
- (3) Automatic arm locking system
- (4) Column chain gaurd/ Door protectors
- (5) 3-stage telescopic lifting arm
- (6) Bracket for extension adapter
- (7) 2-stage adjustable lifting pads / Transporter adapters
- (8) **NEW: Anti-Lift-Up-Button**
- (9) **NEW: 230 V socket**

Dimensions and technical data | The optional base plate reinforcement

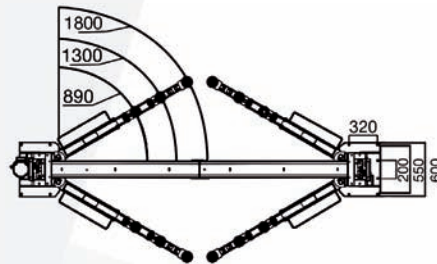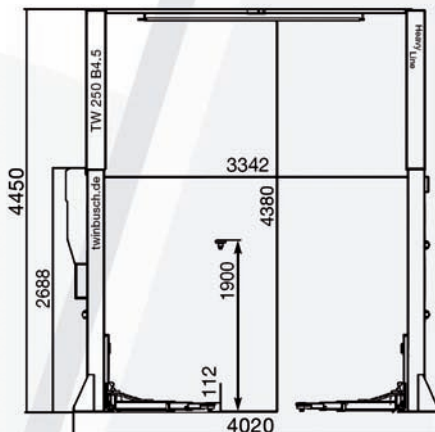

Through experience the required concrete depth (foundation requirement of 200 mm) should be met, this must be checked by the customer. If in exceptional cases the foundation requirement is not met, we offer on page 31 a special solution, which can be used with a concrete thickness of 200 mm to 250 mm.

Technical Data: TW 250 B4.5	
Lifting capacity	5000 kg
Lifting height max.	1900 mm/Ad 2080
Lowest lifting point	112 mm
Lifting, lowering time (approx.)	45/30 sec.
Power supply	400 V / 3 Phase
Motor power	2,2 kW
Fusing	16 A / type C
Weight (approx.)	1070 kg